

Phase II-

Phase II to follow the completion of Phase II diamond drill program.

Designed to test the Main Showing zone along a 140-meter strike length (surface exposure) with a series of 13 drill holes (for 900 meters) the known zone to vertical depths from minus 15 to minus 75 meters. This drilling will fill in gaps in information from the 2009 drill program and will also test the area above, below and laterally from the high-grade intersection at -55 meters in historical hole 26 (298.43 gpt over 0.5 meters). The program will also assist in determining whether an assumed shallow western plunge to the gold mineralization exists.

Proposed Program:

Phase II DD Program Proposal Nicholson Property

Hole	Section	Northing	Dip	Length (meters)	Intersection (meters)
N-25-04	4+50W	0+50N	-45	25	-15
N-25-05	4+50W	1+00N	-63	60	-50
N-25-06	4+00W	1+00N	-60	55	-43
N-25-07	4+00W	2+00N	-50	85	-60
N-25-08	3+50W	2+00N	-60	100	-75
N-25-09	3+00W	1+00N	-63	60	-45
N-25-10	3+00W	2+00N	-50	85	-50
N-25-11	2+00W	2+00N	-50	85	-50
N-25-12	1+50W	1+00N	-63	30	-23
N-25-13	1+50W	2+00N	-60	100	-75
N-25-14	1+00W	2+00N	-50	85	-60
N-25-15	0+50W	1+00N	-75	45	-38
N-25-16	0+00	2+00N	-50	85	-60

Total: 900m

Proposed Costs:

Diamond drilling (all-in)	900 m X \$170/m	153,000
Core trays + shipping	210 trays x \$10.50	2,205
Assaying + shipping	\$40 per X 150	6,000
Geologist	\$700/day X 20 days	14,000
Assistant	\$350/day X 20 days	7,000
Vehicle	5,500 km X 0.65/km	3,575
Lodging	\$1,200/wk X 3 wk	3,600
Food	\$200/wk X 3 wk	600
Bush vehicle	\$100/day X 20 days	2,000
Report/filing	\$700/day X 7 days	4,900
Total:		196,880
15% contingency:		33,220
Grand total:		230,000

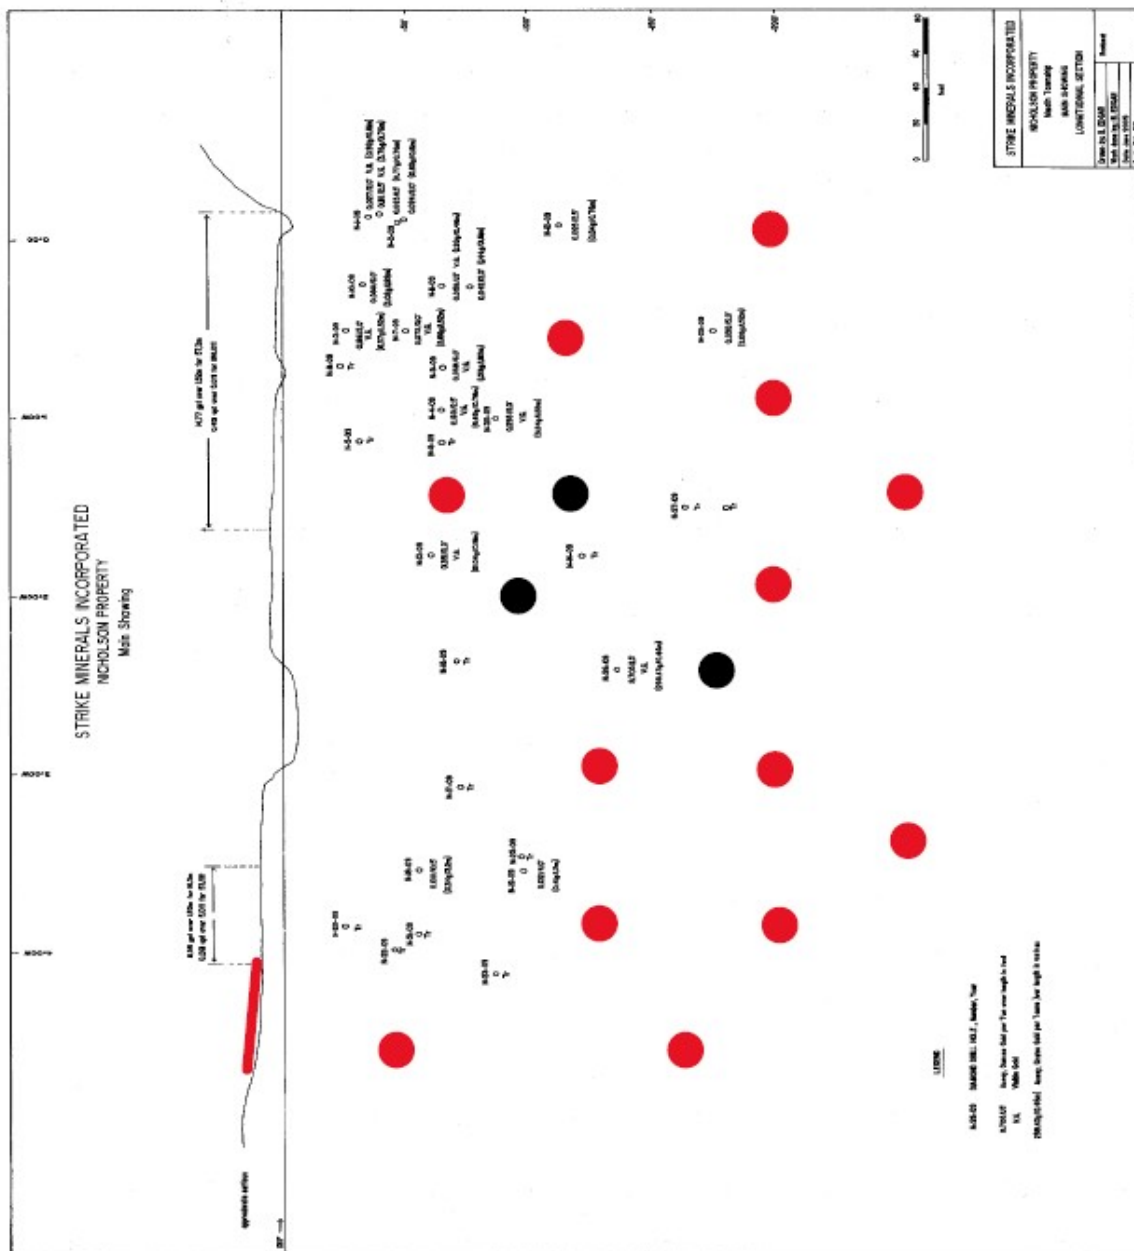


Figure 18

Nicholson Main Showing Phase II proposed drill hole intersections
Longitudinal Section (after Strike Minerals 2009 Drill program)

(black circles indicate proposed Phase I intercepts)